

MARION COUNTY SURVEYOR'S OFFICE



SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 1 TWN. 14_N RNG. 2_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 2-2-05
Party Chief: Kiste
Crew:
Type of Marker: Harrison
Method of Establishment: County: 3-15-1996
IN S.P.C. E Zone, NAD 83 (1986)
Name: 14020106
N: 492 725.040 0(m)
E: 49 917.810 0(m)

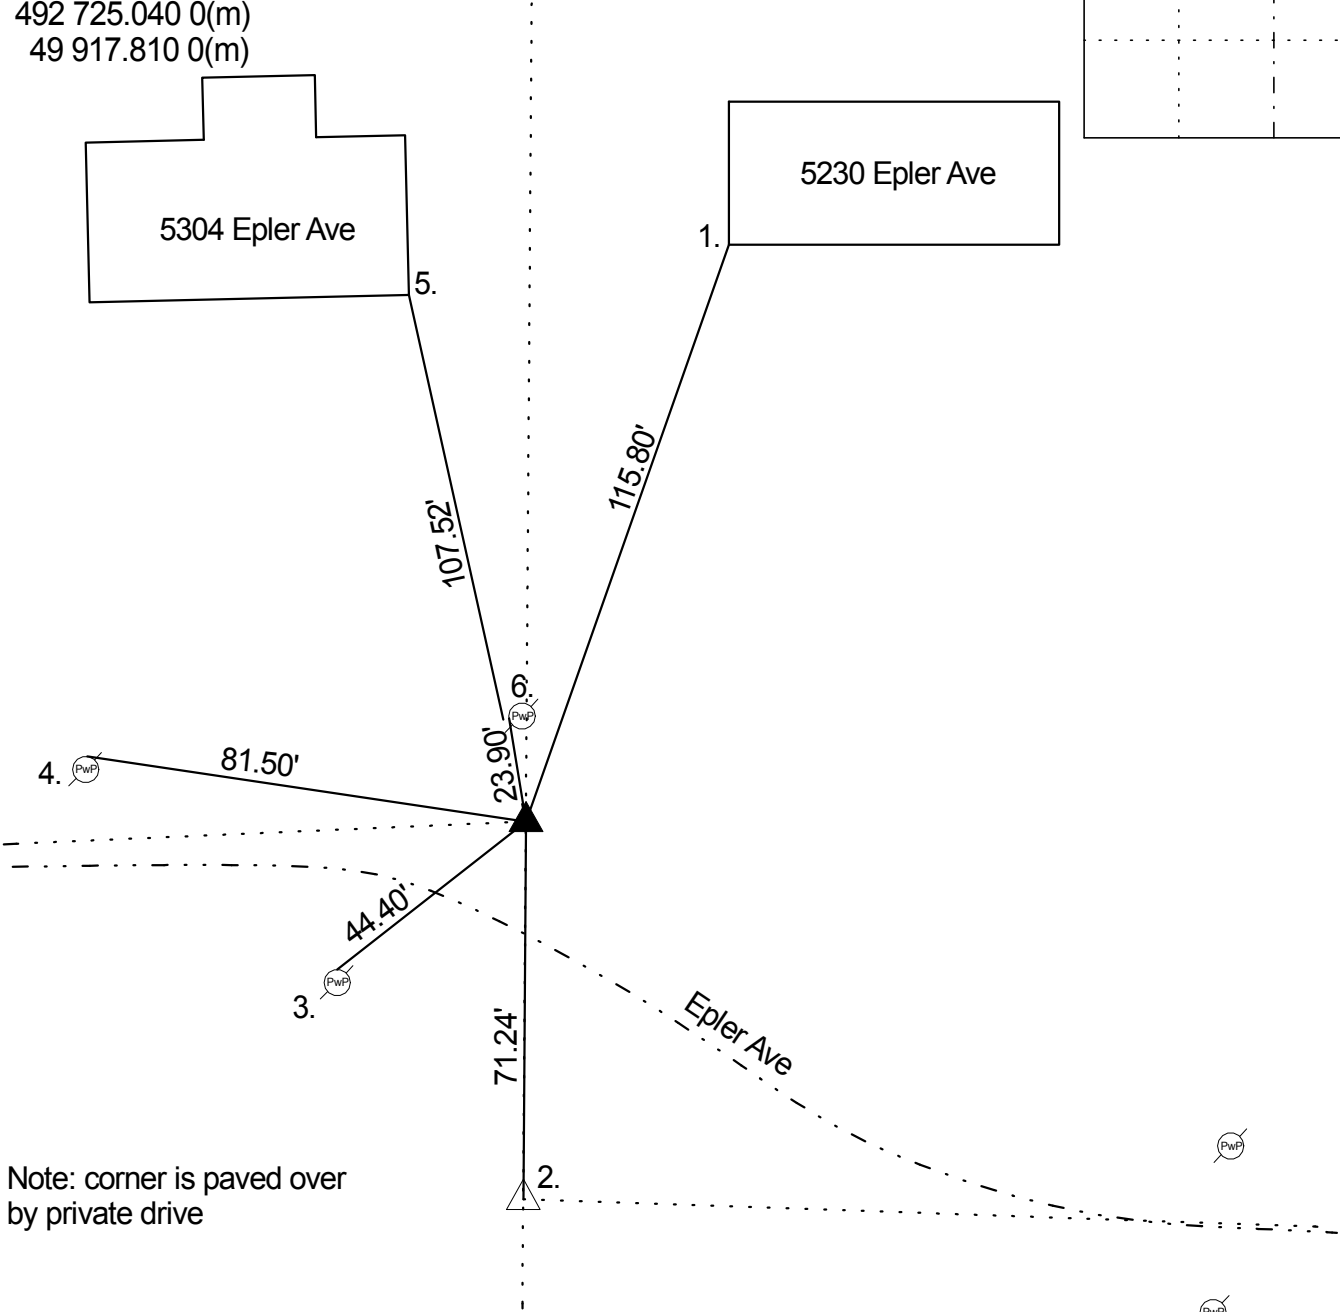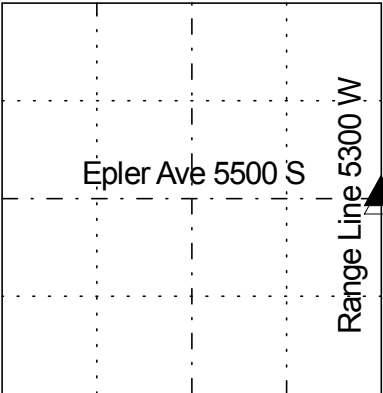

Original post set 1819 by John McDonald with witnesses: 14" Hickory S 55 W 10 links, 15" Oak N 69 E 27 links per Marion County Atlas pg. 1. Fatout 1884 made no mention of monuments nor witnesses. 4-10-1974 McLand called iron pipe over stone 12" down. 7-2-85 Wilcoxon called the same. Excavated 6-10-91 and a large road nail was found at surface. 1" iron pipe found 3" down. Stone found 12" down. Set Harrison. Retied 3-15-1996 by Wilcoxon. Retied 1-13-2000 by Wilcoxon. Retied 2-2-05 by Kiste.

REF	DISTANCE	DESCRIPTION
1.	115.80'	SW corner of 5230 Epler; 2nd brick up
2.	71.24'	Due S to W 6-14-3 (5/8" rebar)
3.	44.40'	PK nail N PwP # 344-685 12" up
4.	81.50'	PK nail N PwP # 343-685 12" up
5.	107.52'	SE corner of 5304 Epler; 6th stone up
6.	23.90'	PK nail W PwP #52-686 10" up